


# 0.7mm Movement Free Space etMEMS™ Attenuator/Shutter Chip



(Protected by US patents pending)

DATASHEET

[Return to the Webpage](#)



The etMEMS™ series of free space variable optical attenuator (FS-VOA) is based on a proprietary patent pending micro-electro-mechanical mechanism featuring exceptionally compact size with large shutter movement, simple construction, and direct drive. The etMEMS™ series of FS-VOA is designed to completely block a collimated light beam  $\leq 700\mu\text{m}$  in diameter and be operated in air without the need for hermetic seal and is fully compliant with the Telcordia 1209 and 1221 reliability standards. The device is ideally suited to be integrated into laser and coherent detection systems.

The different movement FS-VOA chip up to  $700\mu\text{m}$  is available, please contact us.

## Features

- Compact
- High Reliability
- Low IL, PDL, WDL & TDL
- Intrinsic tolerance to ESD

## Applications

- Power Control
- Power Regulate
- Channel Balance
- Instrumentation

## Specifications

Parameter	Min	Typical	Max	Unit
Attenuation Resolution		Continuous		
Shutter Movement		700		$\mu\text{m}$
Response Time		20	60	ms
Optical Power Handling		500		mW
Driving Voltage <sup>[1]</sup>		4	5	V
Device Resistance		100 <sup>[2]</sup>		Ohm
Power Consumption			210	mW
Resonant Frequency	100			Hz
Operating Temperature	-5		75	°C
Storage Temperature	-40		85	°C
Reliability	Telcordia 1209 and 1221			
Package Dimension	See drawing below			

### Note:

- [1]. For full dynamic range.
- [2]. At voltage 4V.

**Legal notices:** All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 02/08/25


# 0.7mm Movement Free Space etMEMS™ Attenuator/Shutter Chip



(Protected by US patents pending)

## DATASHEET

### Mechanical Footprint Dimensions (mm)

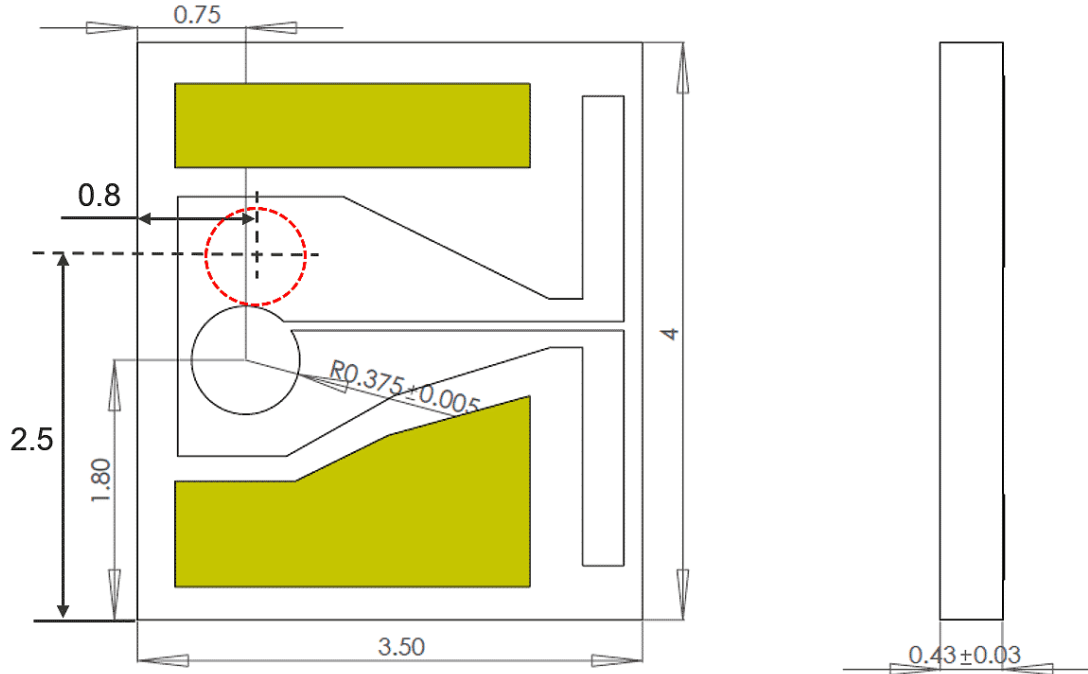


#### NOTE:

The red dash-line represents the shutter position under -4V.

\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

### VOA Performance

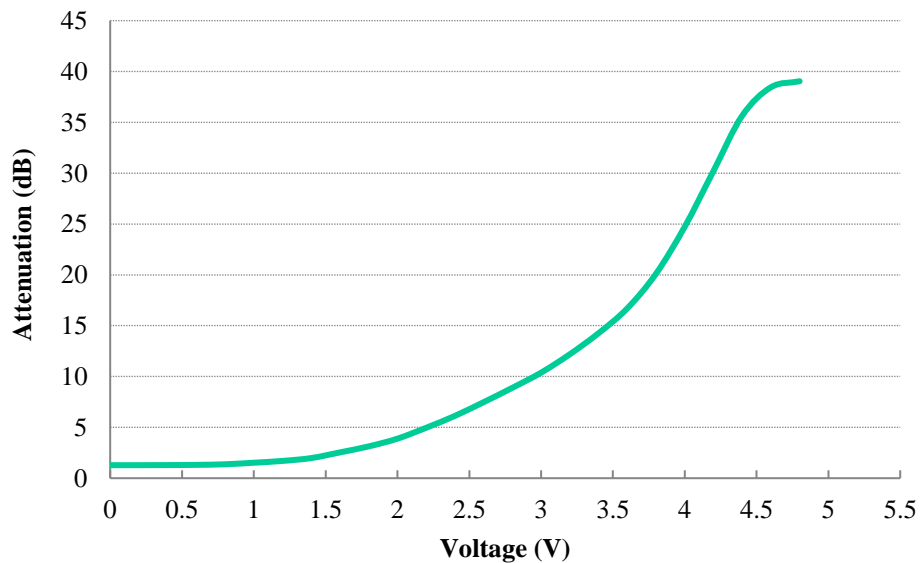

# 0.7mm Movement Free Space etMEMS™ Attenuator/Shutter Chip



(Protected by US patents pending)

## DATASHEET

### Electronic Driving Instruction

#### NOTES:

- Electrode pads on front surface are for control voltage without polarity.
- Do not apply more than 6V.

### Ordering Information

P/N: FSVOA-70111010C (Standard)

	70	1	<input type="checkbox"/>	1	<input type="checkbox"/>	<input type="checkbox"/>	0	C
Prefix	Shutter size	Wavelength	VOA Type	Shutter Surface	Chip Package	Chip Design	Electric Connection	
FSVOA-	∅700µm <sup>[1]</sup> = 70	Broadband = 1	Standard = 1 Special = 0	Gold = 1	Bare = 2 Sub-mount <sup>[2]</sup> = 1 Special = 0	Standard = 1 Special = 0	No PIN = 0	

[1]. The different shutter size is available, please check other size FS-VOA chip data sheet.

[2]. Flying wires type; two leads are provided

# 0.7mm Movement Free Space etMEMS™ Attenuator/Shutter Chip



(Protected by US patents pending)

## DATASHEET

### Typical Insertion Loss vs Wavelength (1240-1630nm)

1x2 MEMS Switch

