


High Power 1x2, 2x2 Multimode Fiber Optic Coupler/Splitter

(30W)



DATASHEET

[Return to the Webpage](#)

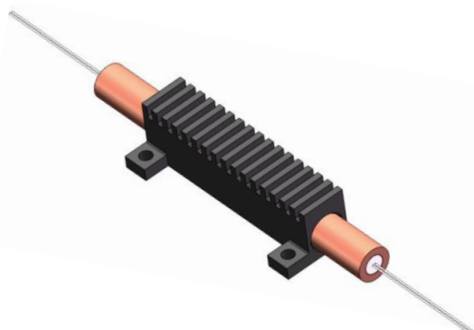

Features

- Wavelength Independent
- Low Insertion Loss
- Low PDL
- Highly Stable & Reliable
- Ultra Low Cost

Applications

- Laser
- Instrument

The HPFC Series fiber optic coupler is fully tested and burn-in at the specified high power for quality control. 2x2 can be used as 1x2 in which the reflected optical power is safely guided out through the extra fiber. An angle termination on the extra fiber is required to avoid backreflection. The coupler is based on Agiltron's fused biconical taper technology and compact packaging structure. It features good uniformity, low excess loss and very low polarization sensitivity. The device is ideal for splitting or combining light with exceptional performance over a wide wavelength range.

Couplers are highly efficient in splitting light with little loss, about 0.2dB per joint, but incur significant losses when combining lights; for example, a 50/50 coupler produces a 50% loss to each beam when combined. For beam-combining applications, search Combiner.

Specifications

Parameter		Min	Typical	Max	Unit
Splitting Ratio		1/99 to 50/50			%
Bandwidth		915 ± 15 and 975 ± 15			nm
		Grade A			
Excess Loss ^[1]			<0.5		dB
Insertion Loss ^[1]	50/50		<4.0		dB
	40/60		5.0/3.0		dB
	30/70		6.3/2.4		dB
	20/80		8.1/1.7		dB
	10/90		11.6/1.2		dB
	5/95		15.0/1.0		dB
	1/99		21.0/0.8		dB
	Directivity		>40		dB
Uniformity			1.0		dB
Optical Power Handling			30		W
Operating Temperature		-40		85	°C
Storage Temperature		-50		85	°C
Fiber Types		105/125 NA=0.15 or NA=0.22			

Notes:

[1]. Without connector. Each connector adds 0.3dB and 0.5dB for short wavelength

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):



Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 07/17/25

High Power 1x2, 2x2 Multimode Fiber Optic Coupler/Splitter


(30W)




DATASHEET

Mechanical Dimensions (mm)

Package 1

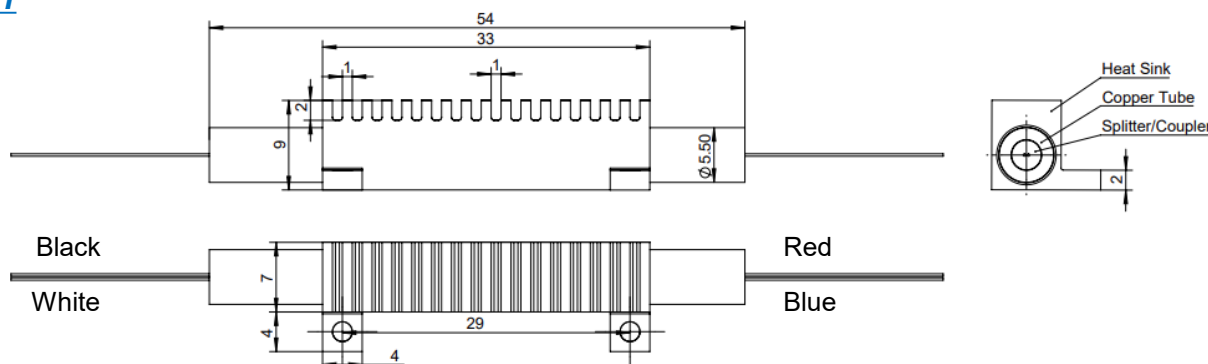

Package 2

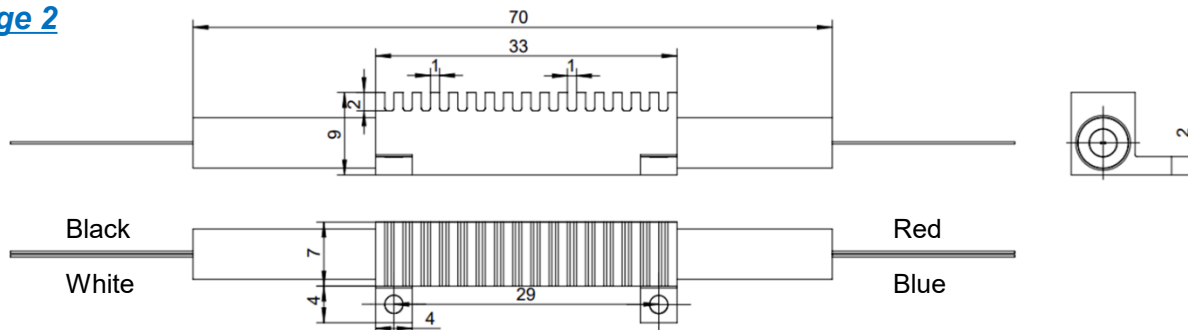

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Ordering Information

Prefix	Power	Wavelength	Grade	Package	Splitting Ratio	Fiber Type	Fiber Cover	Fiber Length	Connector *
HPFC-	30W = 3	915 = 2 975 = 3 Special = 0	A Grade = A Aerospace ^[1] = A	(\emptyset)3x(L)54 = 1 (\emptyset)3x(L)70 = 2 Special = 0	01/99 = 1 02/98 = 2 05/95 = 3 10/90 = 4 20/80 = 5 30/70 = 6 40/60 = 7 50/50 = 8 Special = 0	0.22NA 105/125 = 3 Special = 0	250 μ m fiber = 1 900 μ m tube = 2 3mm cable = 4 Special = 0	0.5m = 1 0.75m = 2 1.0m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 Special = 0

[1]. Aerospace-grade package featuring an aluminum metal casing filled with a specially formulated RTV compound that is both vibration-resistant and thermally conductive, specifically designed to endure repeated thermal shock cycles from -45°C to 90°C.

* **Connector Note:** These high power beam expanded connectors are made specially that must be used in pair with Agiltron type connectors. They are not compatible with regular connectors.

Note:

Standard fiber optical connectors can only handle optical power of about 0.5W and will slowly burn over 1W. Agiltron produces high-power connectors with optical power handling of up to 15W, but they must work in pairs. *For details, click the link below.*

<https://agiltron.com/product/high-power-fiber-optic-connector/>

High Power 1x2, 2x2 Multimode Fiber Optic Coupler/Splitter

(30W)



DATASHEET

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters ($<5\text{ }\mu\text{m}$) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.