

Mini Integrated Power Monitor

(in line package)

(patent pending)

Product Description

The Tap Optical Power Monitor is a hybrid fiber optical passive component that integrates a thin-film tap of flat spectral response with a high sensitivity PIN photodiode for power monitoring applications. The Power Monitor minimizes component assembly costs and module footprint while increasing module design efficiency by facilitating fiber Management.

The Power Monitor combines the functionality of an optical coupler and a photodiode while delivering low insertion loss and low dark current with high temperature stability over a wide wavelength range. Our directional version works well from 1260nm to 1620nm band.



Performance Specifications

TM Series Power Monitor	Min	Typical	Max	Unit
Wavelength	1260		1620	nm
Tap Ratio	1	3	5	%
Insertion Loss	0.45	0.6	0.70	dB
Responsivity ¹	8	25	45	mA/W
Input Power ²	-45		23	dBm
Wavelength Dependent Loss		0.002	0.003	dB/nm
Responsivity Flatness (1520-1620nm)		±0.2		dB
Return Loss	50	55		dB
Polarization Mode Dispersion			0.05	ps
Polarization Dependent Loss		0.03	0.06	dB
Polarization Dependent Responsivity		0.02	0.1	dB
Dark Current at 23°C		0.1	0.9	nA
Directivity ³		NA or >25		dB
Capacitance		0.2	0.6	pF
Reverse Voltage			20	V
Response Bandwidth		1.5		GHz
Operating Temperature	-5		75	°C
Storage Temperature	-40		85	°C
Reliability		Telcordia 1209 and 1221		
Fiber Type		SMF28, or Panda PM		
Package Dimension		φ3.5×L14.5 or shorter mm		

Notes:

Parameters are specified for the signal wavelength range, all polarization states, and operating temperature range without connector unless otherwise stated.

1. The net responsivity is defined as the ratio of the PD current output and optical power measured at output fiber
2. The maximum optical power is the maximum value of the power at input port within the PD linearity range specified.
3. Directivity defines the responsivity contrast between the case that light power comes from input fiber port and the case that light power comes from output fiber port. From 1260 to 1620nm. NR=not requested.

Features

- Integrated
- Low Loss Device
- Custom Tap Ratios Available
- Compact Design


Applications

- Channel Monitoring
- Power Monitoring in Optical Interface Modules
- Gain Monitoring for Amplifier
- DWDM System Monitoring



Mini Integrated Power Monitor

Mechanical Footprint Dimensions (Unit:mm)

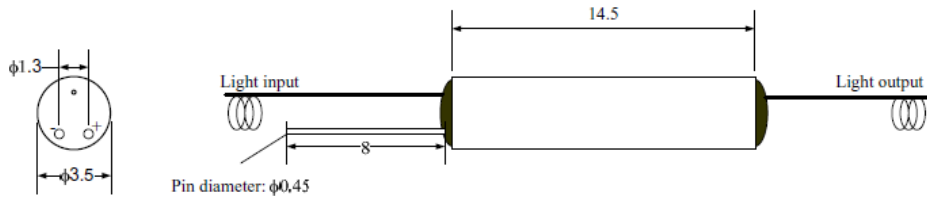

Ordering Information

TOPM-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Tap Ratio	Wavelength	Directivity	Fiber Type		Fiber Length	Connector
	1%=S1 3%=S3 5%=S5 Special=00	1310=3 1550=5 13/15=8 1260-1620=9 Special=0	NR=1 Yes=2	SMF-28=1 Panda PM=2 Special=0	Bare fiber=1 900um Loose Tube=3 Special=0	0.25m=1 0.5m=2 1.0 m=3 Special=0	None=1 FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 ST/PC=6 LC=7 Special=0