

CrystaLatch™

1x16 PM High Power (5W) Bidirectional Solid State Fiberoptic Switch

(Protected by U.S. patents 7224860, 6757101, 6577430 and pending patents)

Product Description

The CL Series 1x16 PM High Power Bidirectional Solid State fiberoptic switch connects optical channels by redirecting an incoming optical signal into a selected output fiber. This is achieved using patented non-mechanical configurations and activated via an electrical control signal. Latching operation preserves the selected optical path after the drive signal has been removed. The all solid state CL 1x16 PM High Power Bidirectional fiberoptic switch features low insertion loss, high extinction ratio, high channel isolation, and extremely high reliability and repeatability. It is designed to meet the most demanding switching requirements of continuous operation without failure, longevity, operation under shock/vibration environment and large temperature variations, and fast response time.

The switch also has build-in Circulator and isolator functions. Electronic driver is available for this series of switches.



Performance Specifications

CL Series 1x16 PM BD Switch	Min	Typical	Max	Unit
Operation Wavelength ^[1]	1520	1550	1580	nm
	1295	1310	1325	nm
Insertion Loss ^[2]		1.5	2.6	dB
Uniformity		0.7	1.0	dB
Cross Talk ^[2]	35	50		dB
Return Loss ^[2]	50			dB
Extinction Ratio	18	25	30	dB
Polarization Mode Dispersion			0.2	ps
Switch Speed (Rise, Fall)	50	200		μs
Repetition Rate	2K			Hz
Durability	10 ¹¹			cycle
Optical Power Handling			5	W
Switch type		Solid-State Latching		
Operating Temperature	-5		65	°C
Storage Temperature	-40		85	°C
Fiber Type		Panda PM fiber		


[1]. Agiltron can achieve same SPEC at L band

[2]. Measured without connectors.



CrystaLatch™ 1x16 PM High Power (5W) Bidirectional Solid State Fiberoptic Switch

Mechanical Dimensions (Unit: mm)

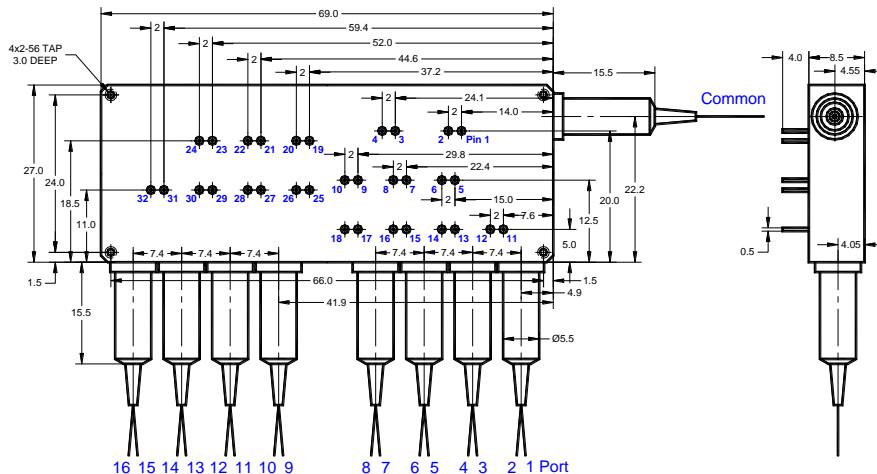

Electrical Driving Information

Each switching point is actuated by applying a voltage pulse. Applying one polarity pulse, one light path will be connected and latched to the position. Applying a reversed polarity pulse, another light path will be connected and latched to the position after pulse removed.

Parameter	Minimum	Typical	Maximum	Unit
Resistance (each group)	15	18	22	Ω
Switch Voltage	2.5	2.5	2.75	V
Pulse Duration	0.2	0.3	0.5	ms

Driving kit with USB and TTL interfaces and Windows™ GUI is available. We also offer RS232 interface as an option - please contact Agiltron sales.


Electric Driving Table

Optical Path	PG1 *				PG2				PG3				PG4				PG5				PG6				PG7				PG8				PG9				PG10				PG11				PG12				PG13				PG14				PG15				PG16			
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32																																
C↔P1	+	-	+	-	+	-	+	-	+	-	+	-	-	+	-	+	-	+	-	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-																														
C↔P2	-	+	-	+	+	-	+	-	+	-	+	-	-	+	-	+	-	+	-	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-																														
C↔P3	+	-	+	-	-	+	+	-	+	-	-	+	+	-	-	+	-	+	-	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-																														
C↔P4	-	+	-	+	-	+	+	-	+	-	-	+	+	-	-	+	-	+	-	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-																														
C↔P5	+	-	+	-	-	+	-	+	-	-	+	-	+	+	-	-	+	-	+	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-																														
C↔P6	-	+	-	+	-	+	-	+	-	-	+	-	+	+	-	-	+	-	+	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-																														
C↔P7	+	-	+	-	-	+	-	+	-	-	+	-	+	-	-	+	-	+	-	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-																														
C↔P8	-	+	-	+	-	+	-	+	-	-	+	-	+	-	-	+	-	+	-	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-																														
C↔P9	+	-	-	+	NC**	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-																															
C↔P10	-	+	+	-	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-																															
C↔P11	+	-	-	+	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-																															
C↔P12	-	+	+	-	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-																															
C↔P13	+	-	-	+	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-																															
C↔P14	-	+	+	-	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-																															
C↔P15	+	-	-	+	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-																															
C↔P16	-	+	+	-	NC	NC	NC	NC	NC	NC	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-																															

* PG1: Pin Group 1. ** NC: No electronic connection,

CrystaLatch™ 1x16 PM High Power (5W) Bidirectional Solid State Fiberoptic Switch

Functional Diagram

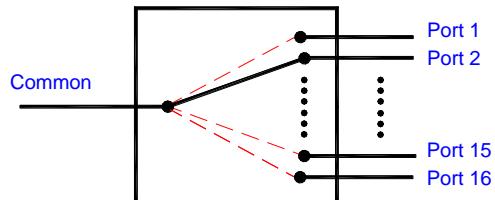

CL 1x16 PM High Power Bidirectional Switch

Ordering Information

CPHB ^[1]	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Type	Wavelength	Switch	Package	Fiber Type	Fiber Length		Connector					
1x16=116 Special=000	1310=3 1550=5 Special=0	Dual Stage=2 Special=0	Standard=1 Special=0	PM1300=1 PM14xx=2 PM1550=3 Special=0 Special=0	Bare fiber=1 900µm loose tube=3 Special=0	0.25m=1 0.5m=2 1.0m=3 Special=0	None=1 FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 ST/PC=6 LC=7 Duplex LC=8 MTP=9 Special=0					

[1]. CPHB: CrystaLatch 1x16 PM High Power Bidirectional Switch.



Revision: 11-14-16