


Double-Clad Fiber Coupler 430nm to 680nm

(efficient collecting back reflection lights)



DATASHEET

BUY NOW

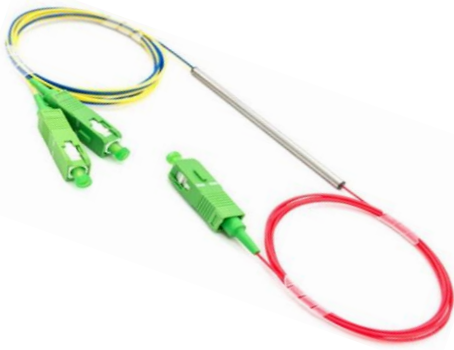

Features

- Single Mode Core Guide
- Multimode Reflection Guide
- Low Loss Transmission
- High Efficient Collection
- Versatile

Applications

- LiDAR
- OCT
- Fluorescence Imaging
- Confocal Microscopy
- Endoscopy

Agiltron's double-clad 2x2 fiber coupler combines a double-clad fiber (single mode core surrounded by a multimode inner cladding) with a large core multimode fiber. Light in the single mode core of the double-clad fiber (DCF) is guided through the coupler with little loss (≤ 0.5 dB). Light in the multimode inner cladding of the DCF is transferred to the output multimode fiber with $\geq 60\%$ transmission.

Specifications

Parameter	Min	Typical	Max	Unit
Operation Wavelength	430	532	680	nm
Single Mode Core Insertion Loss ^[1]		0.3	0.6	dB
Multimode Cladding Transfer ^[2]		60	70	%
Optical Power Handling			50	mW
Core Diameter (NA=0.11)		2.3		μm
Inner Cladding Diameter (NA=0.19)		15		μm
Collection Fiber Diameter (NA=0.22)		200		μm
Operating Temperature	-40		70	$^{\circ}\text{C}$
Storage Temperature	-40		85	$^{\circ}\text{C}$

Notes:

[1]. Exclude connectors and fiber loss, the loss may degrade over time due to shortwave radiation

[2]. Port 2 to 3. Exclude connectors and the water absorption region around 1383 nm

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 12/21/23

Double-Clad Fiber Coupler 430nm to 680nm

(efficient collecting back reflection lights)



DATASHEET

Ordering Information

Prefix	Center Wavelength	Collect Fiber	Double Cladding	Pigtail Style	Fiber Length	Connector Input	Connector Output	Connector Signal
DCFC-	1030 = 1 1310 = 3 780 = 7 530 = 5 Special = 0	200 μ m NA=0.22 Special = 0	Core=2.3 μ m, NA=0.11 Cladding=15 μ m, NA=0.19 Special = 00	900um Jacket = 2 Special = 0	0.25m = 1 0.5m = 2 1.0m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3	None = 1 FC/PC = 2 FC/APC = 3 SMA = 4	None = 1 FC/PC = 2 FC/APC = 3 SMA = 4