


Free-Space RTP Electro-Optical Modulator

(2, 4, 6, 8mm aperture, 400nm to 2000nm)



DATASHEET

BUY NOW

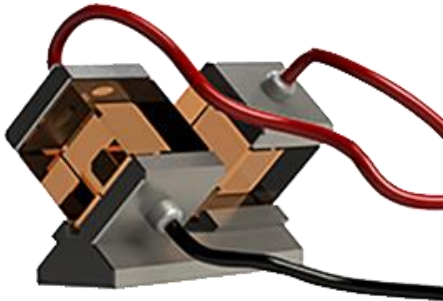

Features

- High Power Damage Threshold
- Short Wave Operation High Stability
- Low Driving Voltage
- No Piezoelectric Ringing
- High Speed
- High Transparency
- Wide Wavelength Range
- Non-Hygroscopic

Applications

- Q-Switch
- Phase/Power Modulation
- Pulse Picker

Made with the highest quality rubidium titanyle phosphate (RTP), the FRTP series Pockels cells provide the industry's best free space electro-optic modulation performance. FRTP offers salient benefits of high optical damage threshold, short wavelength durability, low distortion, low driving voltage, fast modulation rates, minimal, and exceptional stability. RTP is a unique electro-optical material that is free of the deficiencies associated with other electro-optical materials, including charge build-up induced degrading and photorefractive induced defects when passing shortwave or high optical power light through it, also piezoelectric induced ringing to the signals. Our RTP Pockels cells are made using a matched pair of crystals to counteract RTP's index refraction thermal drift, enhancing the device's environmental stability. RTP Pockels cells have the electric field applied perpendicular to the direction of the light path, resulting in uniform electro-optic response with minimum distortion to the laser's optical mold properties, and low driving voltage. We offer four aperture sizes of 2mm, 4mm, 6mm, and 8mm. Polarization cubes can be aligned and installed at both input and output ports to form an intensity modulator.

Specifications

Parameter	Min	Typical	Max	Unit
Wavelength Range ^[1]	350		450	nm
	400		600	
	600		900	
	900		1250	
	1250		1650	
Clear Aperture ^[2]		2, 4, 6, 8		mm
Halfwave Voltage ^[3]	532nm	400	4000	V
	1064nm	800	8000	
Material Purity	99.8			%
Extinction (on/off) ^[4]	20		35	dB
Rise/Fall Time (10-90%)	0.5		1.1	ns
Angle Tolerance (perpendicularity)		± 0.15		degree
Parallelism	5			"
Humidity (non-condensing)			80	%
Capacitance (dielectric constant e~13)		14		pF
Damage Threshold	532nm		1	MW/cm ²
	1064nm		600	
Surface Scratch/Dig		20/10		mm
Operation Temperature	-40		80	°C
Material Density		3.6		g/cm ³
Material Hardness		5		Mohs
Material Melting Point		1000		°C
Ferroelectric Transition Temperature		810		°C
Thermal Optical Coefficients		-0.029		nm/°C
Electrooptic Coefficients	r ₂₃ =12.5	r ₃₃ =35	R ₅₁ =38.5	pm/V
Material Electrical Resistivity		10 ¹¹		Ω·cm

[1]: These are standard AR coatings, custom AR coating is available with narrower band for lower loss

[2]: These are standard sizes, custom size is available with max length up to 25mm for lower driving voltage

[3]: This relates to crystal size; the smaller the aperture, and the longer the length, the lower the driving voltage

[4]: Measure at DC using two crossed polarizers

Warning: Do not clean the optical surfaces. Do not solder on crystals causing cracks. High voltage on the electrodes is extremely dangerous.

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 04/05/24

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.

Free-Space RTP Electro-Optical Modulator

(2, 4, 6, 8mm aperture, 400nm to 2000nm)




DATASHEET

Warning

- Do not use it, if you are not well trained.
- Do not look at. Even indirect exposure to high power laser light can cause eye damage.
- Do not touch it. The driving high voltage can cause serious injury.
- Do not clean the optical surfaces that cause damages
- Do not solder to the crystal that causes cracks inside.

Mechanical Drawing (mm) – (It is related to the crystal size)

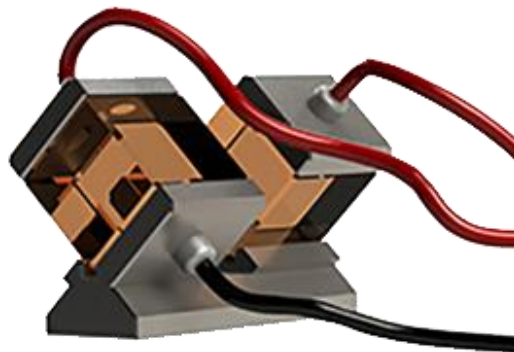

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Ordering Information

Prefix	Wavelength	Aperture	Length	Grade ^[1]	Input Cube ^[2]	Output Cube ^[2]	Mounting	Driver
RTPM-	400~600nm = 05 600~900nm = 07 900~1250nm = 09 1250~1650nm = 14 350~450nm = 04	2mm = 2 4mm = 4 6mm = 6 8mm = 8	5mm = 5 8mm = 8 10mm = A 20mm = B 25mm = C	Standard = S Premium = P Ultra = U	No = 1 Polacore = 3 PBS = 4 Glan-Thompson = 5	No = 1 Polacore = 3 PBS = 4 Glan-Thompson = 5	Non = 1 Yes = 2	Non = 0 Yes = 1

[1]. **Affect Intrinsic Contrast Ratio, Electro-Optic Effect Uniformity, Defect Density** (related to the material selection from an as-grown crystal boule in which near center is the best)

[2]. **Polacore** (1060nm) – CW 10W/cm²
PBS (1060nm) – CW 15W/cm²
Glan-Thompson (1060nm) – CW 2kW/cm²


Free-Space RTP Electro-Optical Modulator

(2, 4, 6, 8mm aperture, 400nm to 2000nm)



DATASHEET

Modulator Half-Wave Voltage (example size)

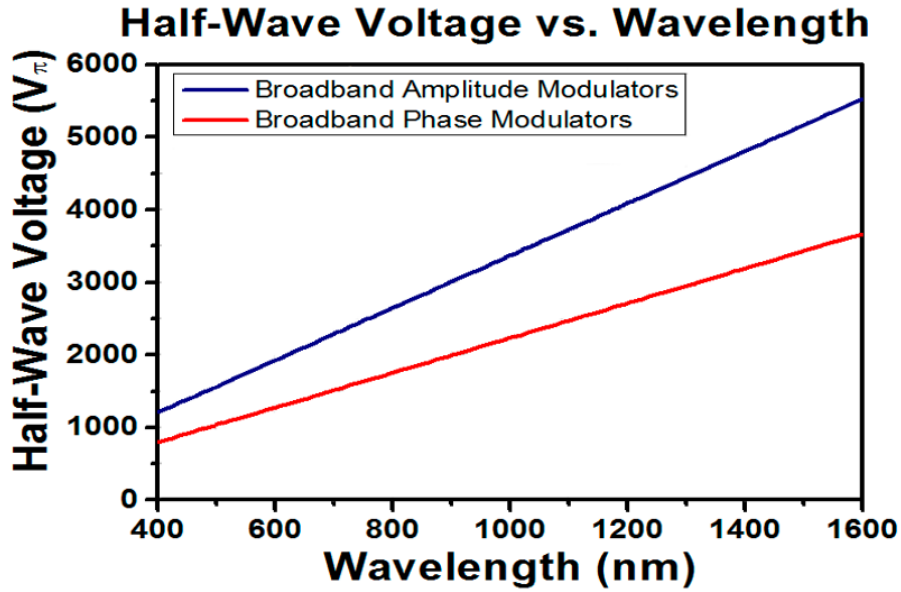

Application Notes (Q-switch alignment)