

# Broadband Low Noise RF Amplifier (LNA)

50kHz-20GHz, 35 dB gain



DATASHEET

[Return to the Webpage](#)



## Features

- Frequency: 50kHz-20GHz
- Signal Gain: 30dB
- NF=3dB
- Vout=4.48Vpp

## Applications

- 5G Communication
- Test Equipment
- Optical Modulator Driver
- Radar System

This LNA broadband Low Noise RF Amplifier provides output power up to 17 dBm with a gain of 35 dB across a frequency range of 50 kHz to 18 GHz. It features a noise figure (NF) of 3 dB within the 0.1-20GHz range. The amplifier operates on +12V DC at 120 mA and is equipped with a SMA Female connector.

## Specifications

Parameter	Min	Typical	Max	Unit
Frequency Range	0.00005	18	20	GHz
Gain		30	35	dB
NF (0.1-20GHz)		3	5	dB
Input Power		-10	0	dBm
P1dB		+17		dBm
Psat		+16		dBm
Output Vpp		4.48		Vpp
Drain Supply	+8	+12	+15	V
Current		80		mA
Input Return Loss		-10		dB
Output Return Loss		-10		dB
Spec Temp		25		°C
Drain Supply		+16		V
RF Input Power		+20		dBm
Input Vpp		3.56		Vpp
Operating Temperature(note)	-20		70	°C
Storage Temperature	-65		+150	°C
Input Port		GPPO Male	2.92mm Female	
Output Port		GPPO Male	2.92mm Female	
Weight (Without Heatsink)		50		g

**Note:** -40 to +85°C is available according to request.

## Caution

Please pay attention to the case temperature. If case temperature exceed higher than +50°C, heat sink and fan are required, or the amplifier may be damaged.



**Legal notices:** All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 03/20/26

[+1 781-935-1200](tel:+17819351200)

[sales@agiltron.com](mailto:sales@agiltron.com)

[www.agiltron.com](http://www.agiltron.com)

# Broadband Low Noise RF Amplifier (LNA)


50kHz-20GHz, 35 dB gain




## DATASHEET

### Test Data (25°C)

#### S21 50MHz-20GHz

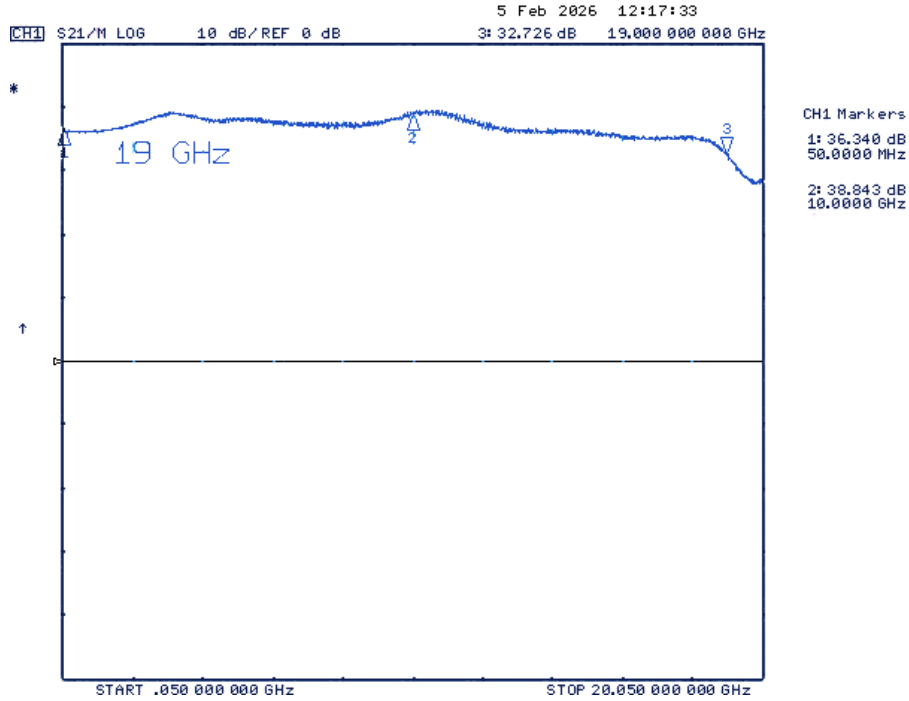

#### Psat vs Frequency

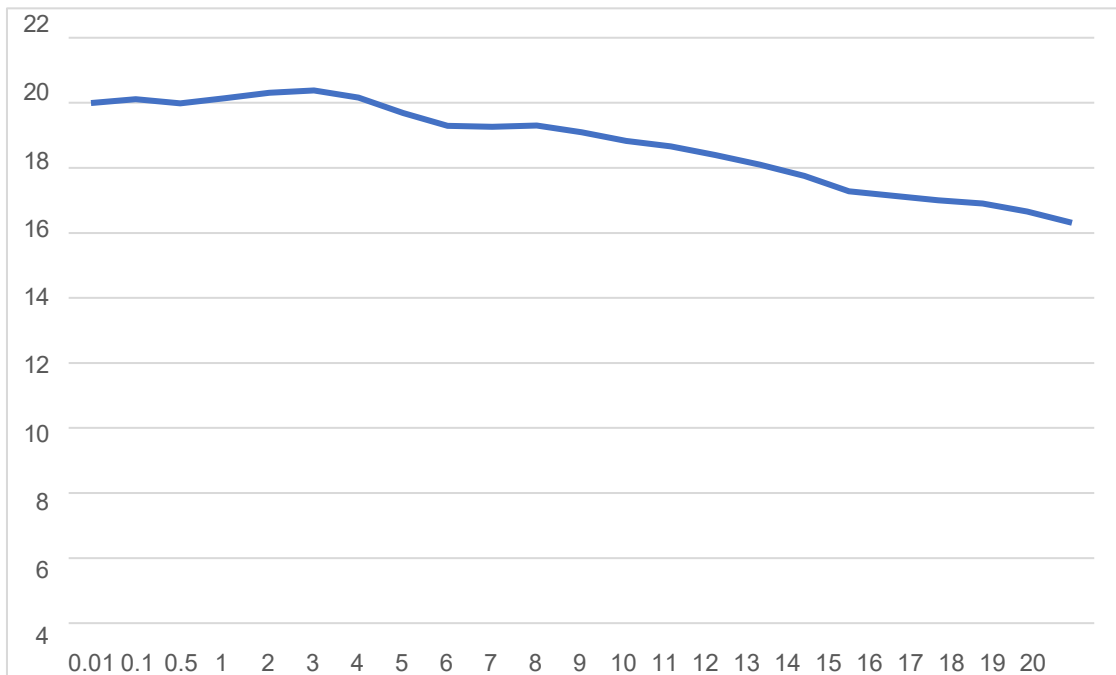


# Broadband Low Noise RF Amplifier (LNA)

50kHz-20GHz, 35 dB gain



## DATASHEET

### Dimensions (mm)

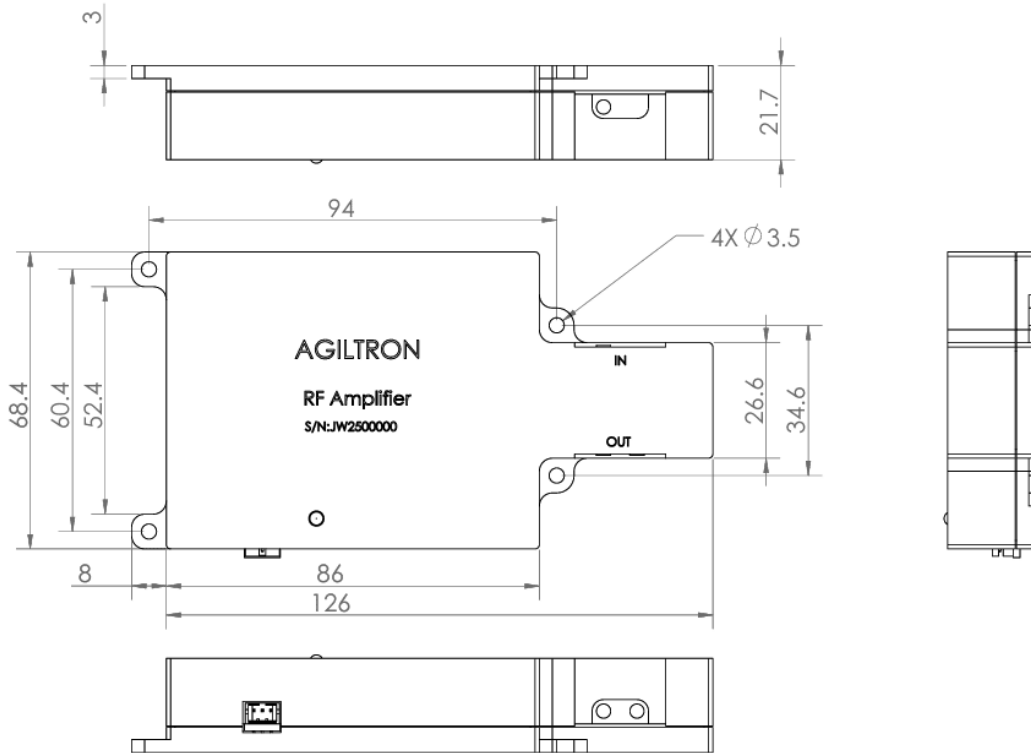

### Ordering Information (Part Number) \*

Prefix	0005	20	30	3	17	<input type="checkbox"/>
Prefix	Low Frequency	High Frequency	Gain	NF	P1dB	Module*
<b>LNAM-</b>	0.05MHz = 0005	20GHz = 20	30dB = 30	3dB = 3	17dBm = 17	No = 0 Yes = 1